


BUSINESS BROCHURE  
EV CHARGER

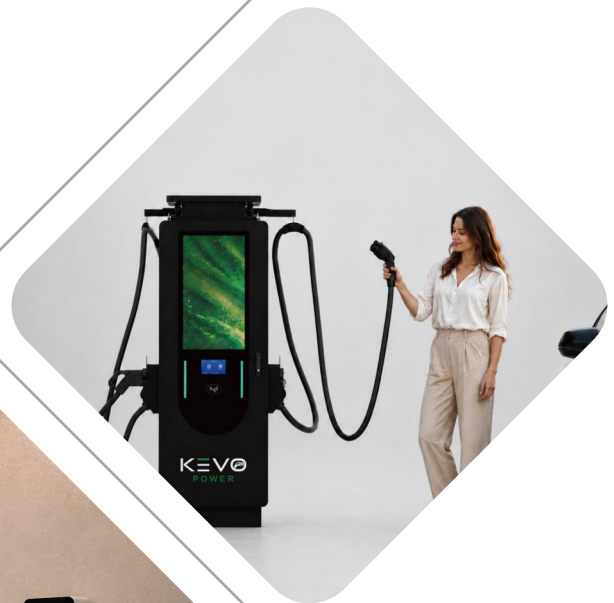

## AC SERIES III

Standard Fast EV Charger

# AC 7KW 11KW 22KW

KP-A7S-III

KP-A11S-III

KP-A22S-III



### Key Benefits



Overvoltage  
Protection



Undervoltage  
Protection



Overcurrent  
Protection



OTA



Grounded/  
Ungrounded



HCI



Overtemperature  
Protection



Lightning  
Protection



IP65



Bluetooth/  
WIFI



Leakage  
Protection



Fully  
Certified

# PRODUCT PARAMETERS

## GB/T

|                       |                                                                                                                               |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------|
| Input Voltage         | 220Vac±20%/380Vac±20%                                                                                                         |
| Product Size          | 400*163*95 mm                                                                                                                 |
| Input Current         | 16A/32A                                                                                                                       |
| Rating                | 7kW/11kW/22kW                                                                                                                 |
| Leakage Type          | A                                                                                                                             |
| Operating Humidity    | 5%-95% condensationless                                                                                                       |
| Operating Temperature | -25 °C~+50 °C                                                                                                                 |
| Functional Support    | Display, Indicator, Swipe Card, Bluetooth/WIFI(optional)                                                                      |
| Protective Function   | Over-voltage protection, over-current protection, leakage protection, over-temperature protection, lightning protection, etc. |

## Type 2

|                       |                                                                                                                               |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------|
| Input Voltage         | 220Vac±20%/380Vac±20%                                                                                                         |
| Product Size          | 400*163*95 mm                                                                                                                 |
| Input Current         | 16A/32A                                                                                                                       |
| Rating                | 7kW/11kW/22kW                                                                                                                 |
| Leakage Type          | A                                                                                                                             |
| Operating Humidity    | 5%-95% condensationless                                                                                                       |
| Operating Temperature | -25 °C~+50 °C                                                                                                                 |
| Functional Support    | Display, Indicator, Swipe Card, Bluetooth/WIFI(optional)                                                                      |
| Protective Function   | Over-voltage protection, over-current protection, leakage protection, over-temperature protection, lightning protection, etc. |

## Type 1/ NACS

|                       |                                                                                                                               |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------|
| Input Voltage         | 240Vac±20%                                                                                                                    |
| Product Size          | 400*163*95 mm                                                                                                                 |
| Input Current         | 32A/48A                                                                                                                       |
| Rating                | 7.6kW/11.5kW                                                                                                                  |
| Leakage Type          | A or CCID20(optional)                                                                                                         |
| Operating Humidity    | 5%-95% condensationless                                                                                                       |
| Operating Temperature | -25 °C~+50 °C                                                                                                                 |
| Functional Support    | Display, Indicator, Swipe Card, Bluetooth/WIFI(optional)                                                                      |
| Protective Function   | Over-voltage protection, over-current protection, leakage protection, over-temperature protection, lightning protection, etc. |



Pragmatic



Indicator light: green always on



Charge Waiting



Indicator light: blue always on



Charging Complete



Indicator light: blue always on



Insert A Gun



Indicator light: green flashing



Charging



Indicator light: blue flashing



Faults



Indicator light: red flashing



**KEVO POWER - EV Charger Solutions Provider**

Online: [kevopower.com](http://kevopower.com)

Email: [info@kevopower.com](mailto:info@kevopower.com)

WhatsApp: +86 15986673554

Address: Tianlilai Industrial Park, Dalingshan, Dongguan City,  
Guangdong Province, China

